


ROCKBOARD® 60

Multipurpose Board Insulation

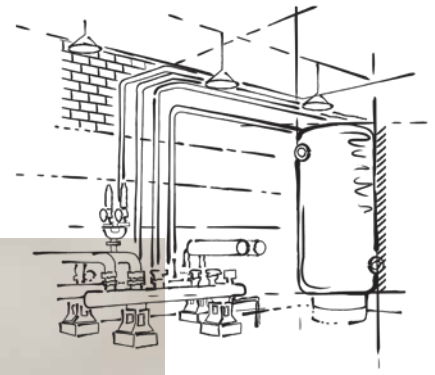

ROCKWOOL ROCKBOARD® 60 is a premium, multi-purpose stone wool insulation board used in walls, ceilings and floors for acoustic and thermal applications.

ROCKBOARD® 60 is non-combustible and fire resistant, and will not produce toxic smoke or promote flame spread, even when exposed directly to a fire. This can add an extra degree of fire resistance and contribute to occupant protection.


ROCKBOARD® products also maintain dimensional integrity under all conditions and, as a result, will not slump, shrink or expand with temperature.

ROCKBOARD® products can be surfaced with different facings to achieve optimal performance results. From mechanical rooms to sound studios to utility rooms, these products add a high-performance barrier to noise and fire.

Learn more at rockwool.com

Superior Acoustic Properties

Excellent sound-dampening characteristics make ROCKBOARD® products ideal for buffering the hum from noisy mechanical rooms.

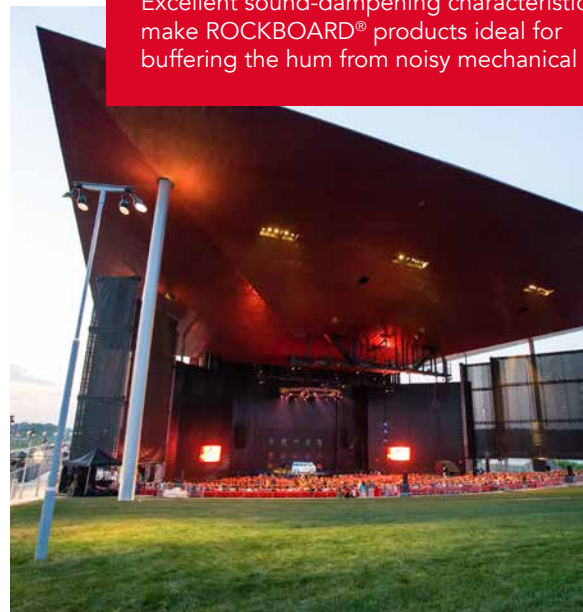

ROCKBOARD® 60

Multipurpose Board Insulation

Technical Data Sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Acoustic Board Insulation 09 81 13**

ROCKWOOL ROCKBOARD® 60 is a rigid, multi-purpose mineral wool insulation board.

| | Performance | Test Standard | | | | | | | |
|------------------------|---|--|--------|--------|---------|--------|---------|------|-----------|
| Compliance | Mineral Fiber Block and Board Thermal Insulation - Type IVB Compliant | ASTM C612 | | | | | | | |
| Reaction to Fire | Flame spread index = 0; Smoke development index = 0 Flame spread index = 0; Smoke development index = 0 Behaviour of materials at 750°C - Non Combustible Hot Surface Performance - 1200°F | ASTM E84 (UL 723) CAN/ULC S102 CAN/ULC S114 ASTM C411 | | | | | | | |
| Density | Actual Density - 6 lbs/ft ³ (96 kg/m ³) | ASTM C303 | | | | | | | |
| Dimensional Stability | Linear Shrinkage - <1% @ 1200°F | ASTM C356 | | | | | | | |
| Corrosion Resistance | Stress Corrosion Cracking Tendency of Austenitic Stainless Steel - Passed Corrosion of Steel - Passed | ASTM C795 ASTM C665 | | | | | | | |
| Thermal Resistance | R-Value / inch @ 75°F 4.3 hr.ft ² .F/Btu RSI value / 25.4 mm @ 24°C 0.75 m ² K/W | ASTM C518 (C177) | | | | | | | |
| Reaction to Moisture | Moisture Sorption by weight - 0.07% Determination of Fungi Resistance - Passed | ASTM C1104 ASTM C1338 | | | | | | | |
| Compressive Strength | 355psf (17kPa) @ 10% compression 585psf (28kPa) @ 25% compression | ASTM C165 | | | | | | | |
| Thickness Dimensions | Product is available in 2" through 4" offerings (50.8 mm - 101.6 mm) 24" x 48" (610 mm x 1219 mm) | | | | | | | | |
| Acoustical Performance | Thickness | 125 Hz | 250 Hz | 500 Hz | 1000 Hz | 2000Hz | 4000 Hz | NRC | ASTM C423 |
| | 2" | 0.32 | 0.81 | 1.06 | 1.02 | 0.99 | 1.04 | 0.95 | |
| | 3" | 0.78 | 0.89 | 1.04 | 0.98 | 1.01 | 1.02 | 1 | |

Issued 01-01-18
Supersedes 08-23-17

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com